




Euroview Parallel Tilt and Slide Door

With a turn of the ergonomic aluminum handle, Parallel Tilt and Slide doors operate in three positions: closed, tilt and slide. An innovative runner mechanism provides smooth projection of the sash which precisely slides in any position desired. The locking mechanism has driven stay arms pulling the sash towards the frame evenly when closing and pushing it off when opening. Even large, heavy door units can be easily operated. When closing, the sash automatically engages in tilt position allowing for safe ventilation—the sash is secured against being pulled open. The turn handles come with anti-lockout device, or a lockable handle with profile cylinder for operation from one or both sides. Multi-Lock security components protect the locking mechanism against forced entry.

By turning the handle 90 degrees, the door automatically opens into the tilt position on the top making it ideal for ventilation. A further 90 degree downward twist of the handle and the door swings out at the bottom part letting the door slide parallel to the side into a preferred opening position.



Euroview Parallel Tilt and Slide Door

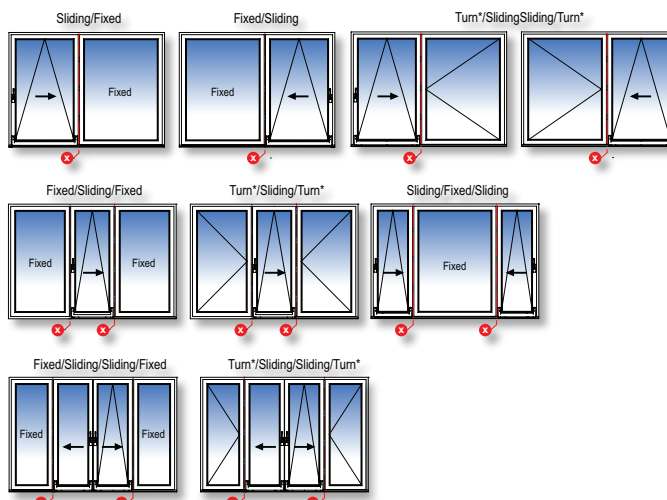

Euroview Performance Matrix

Product	Frame	Glazing	Performance		
Door Type	Frame Height	Sash Height	DP Rating	Unit Size	Size Limitations
Tilt/Slide	100mm	105mm	DP-50	79" x 83"	96" x 96"

Laminate Woodgrain and Colors



Pinnacle® woodgrain and color laminates are inventoried at VEKA Inc., consult your sales representative for samples and details.

Pinnacle
Performance Color Solutions by VEKA

- All main profiles are reinforced with galvanized steel
- Alternative outer frame and sash sizes are available
- Glazing beads available to accommodate IG-Sizes from 3/4" to 1-1/2".
- Ideal in both residential and commercial applications
- Available in 2-panel, 3-panel and 4-panel configurations
- 70mm front to back multi-chambered profiles
- Available in white, clay, wood grain and colored finishes (laminated)

